


1393-A

13.9" Resizing LCD, 600 nits LED backlight, 1280x398

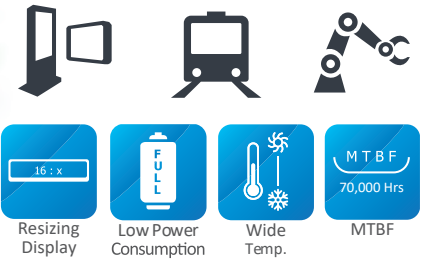

Key Features

- 13.9" resizing LCD
- Resizing display (aspect ratio of 16 : 5)
- Brightness of 600 nits
- Resolutions of 1280 x 398
- Wide temperature range (-30°C~85°C)
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	SSF1393-A	SSH1393-A	SSD1393-A
Description	13.9" Resizing LCD, 600 nits LED backlight, 1280x398		
Screen size	13.9"		
Display area (mm)	337.92(H) x 105.14(V)		
Brightness	600 cd/m ²		
Resolution	1280x398		
Aspect ratio	16:5		
Contrast ratio	700:1		
Pixel pitch (mm)	0.264 (H) x 0.264 (V)		
Pixel per inch (PPI)	96		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	83%		
Display colors	16.7M		
Response time (Typical)	30ms		
Video interface	LVDS	VGA, DVI-D	
Input power		DC 12V	
Power consumption	19W	21W	
Dimensions (mm)	358.5x130x18	358.5x130x18	360.9x132.5x48.6
Bezel size (U/B/L/R)	12.05/10.14/8.45/8.45	12.05/10.14/8.45/8.45	13.3/11.4/9.7/9.7
Weight (Net)	0.7kg	0.9kg	1.5kg
Mounting			VESA 100x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	-30°C ~ +85°C		
Storage temperature	-30°C ~ +85°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1393-ANN-A01	13.9", 600nits, 1280*398, LID on module, 10 in 1, V01
SSH1393-ANN-I01	13.9", 600nits, 1280*398, LID on module, AD6038GD, DC12V, 5 in 1, V01
SSD1393-ANB-I01	13.9", 600nits, 1280*398, LID on module, AD6038GD, O/B, DC12V, 5 in 1, V01