


# 1505-E

15" Resizing LCD, 1000 nits LED backlight, 1280x242

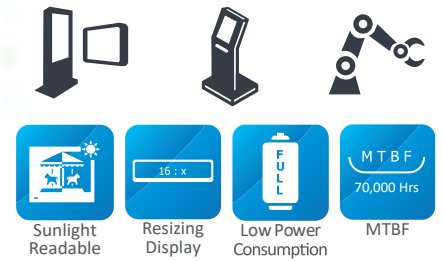

## Key Features

- 15" resizing LCD
- Resizing display (aspect ratio of 16 : 3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1280 x 242
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	SSF1505-E	SSH1505-E	SSD1505-E
Description	15" Resizing LCD, 1000 nits LED backlight, 1280x242		
Screen size	15"		
Display area (mm)	376.3(H) x 71.2(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	1280x242		
Aspect ratio	16:3		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.294 (H) x 0.294 (V)		
Pixel per inch (PPI)	86		
Viewing angle	160° (H), 170° (V)		
Color saturation (NTSC)	79%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D	
Input power		DC 12V	
Power consumption	9W	12W	
Dimensions (mm)	396x94.2x12.2	396x94.2x12.2	410x108.2x39.3
Bezel size (U/B/L/R)	9.6/9.6/7.9/7.9	9.6/9.6/7.9/7.9	17.5/17.5/15.9/15.9
Weight (Net)	0.8kg	1kg	1.25kg
Mounting			VESA 75x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF1505-ENN-A11	15", 1000nits, 1280*242, LID15A, V02
SSH1505-ENN-G11	15", 1000nits, 1280*242, LID15A, AD2662GDM, DC12V, V02
SSD1505-ENB-G11	15", 1000nits, 1280*242, LID15, AD2662GDMD, O/B, DC 12V, V02