


# 1515-E

15.9" Resizing LCD, 1000 nits LED backlight, 1280x512

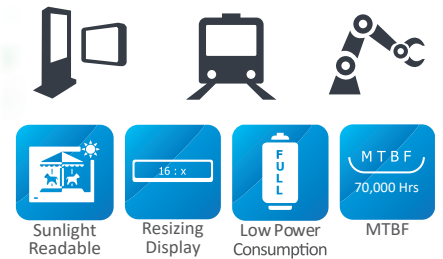

## Key Features

- 15.9" resizing LCD
- Resizing display (aspect ratio of 16:6.4)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1280 x 512
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	SSF1515-E	SSH1515-E	SSD1515-E
Description	15.9" Resizing LCD, 1000 nits LED backlight, 1280x512		
Screen size	15.9"		
Display area (mm)	376.3(H) x 150.5(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	1280x512		
Aspect ratio	16:6.4		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.294 (H) x 0.294 (V)		
Pixel per inch (PPI)	86		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	79%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D	
Input power		DC 12V	
Power consumption	12W	15W	
Dimensions (mm)	396x173.6x12.1	396x173.6x12.1	398.4x176.2x52.7
Bezel size (U/B/L/R)	9.6/9.6/7.9/7.9	9.6/9.6/7.9/7.9	10.85/10.85/9.05/9.05
Weight (Net)	1kg	1.2kg	2.5kg
Mounting			VESA 75x75, 100x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF1515-ENN-A11	15.9", 1000nits, 1280*512, LID15, V02(5 in 1)
SSH1515-ENN-G11	15.9", 1000nits, 1280*512, LID15, AD2662GD, DC 12V, V02(5 in 1)
SSD1515-ENB-G11	15.9", 1000nits, 1280*512, LID15, O/B, AD2662GD, DC 12V, V02