


1722-A

17.2" Resizing LCD, 400 nits LED backlight, 1366x510

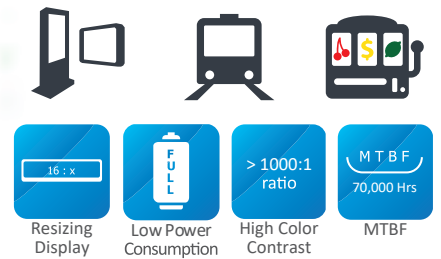

Key Features

- 17.2" resizing LCD
- Resizing display (aspect ratio of 16:6)
- Brightness of 400 nits
- Resolutions: 1366 x 510
- Low power consumption
- BL MTBF: 70,000 hours

Specifications

	SSF1722-A	SSH1722-A	SSD1722-A
Description	17.2" Resizing LCD, 400 nits LED backlight, 1366x512		
Screen size	17.2"		
Display area (mm)	409.8(H) x 153(V)		
Brightness	400 cd/m ²		
Resolution	1366x510		
Aspect ratio	16:6		
Contrast ratio	1500:1		
Pixel pitch (mm)	0.3 (H) x 0.3 (V)		
Pixel per inch (PPI)	84		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	80%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	9W	10W	
Dimensions (mm)	430.4x178.4x12	430.4x178.4x12	433x181x40
Bezel size (U/B/L/R)	10.3/10.3/8.5/8.5	10.3/10.3/8.5/8.5	11.6/11.6/9.8/9.8
Weight (Net)	1kg	1.2kg	1.8kg
Mounting			VESA 100x100, 75x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1722-ANN-A01	17.2", 400nits, 1366*510, LID17A, V01 (4 in 1)
SSH1722-ANN-G01	17.2", 400nits, 1366*510, LID17A, AD2662GDHM, 4 in 1, V1
SSD1722-ANB-I01	17.2", 400nits, 1366*510, LID17A, AD6038GA, O/B, DC12V, V1