
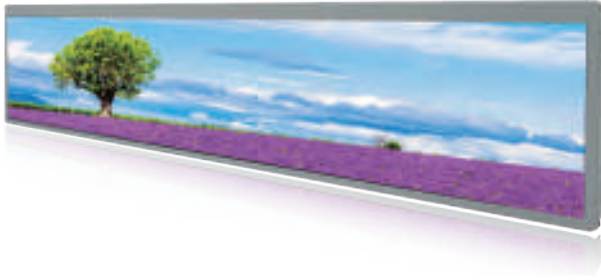


1905-Y

19" TFT LCD, 1000nits LED backlight , 1920x360

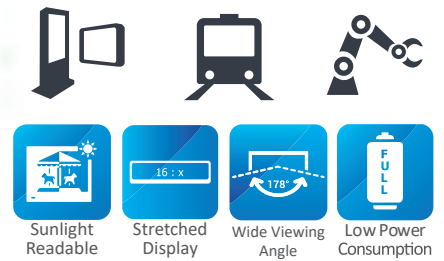

Key Features

- 19" stretched LCD
- Stretched display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 360
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption

Specifications

	SSF1905-Y	SSH1905-Y	SSD1905-Y
Description	19" TFT LCD, 1000nits LED backlight , 1920x360		
Screen size	19"		
Display area (mm)	476.64(H) x 89.37(V)		
Brightness	1000 cd/m ²		
Resolution	1920x360		
Aspect ratio	16:3		
Contrast ratio	1150:1		
Pixel pitch (mm)	0.2482(H) x 0.2482(V)		
Pixel per inch (PPI)	103		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	84%		
Display colors	16.7M		
Response time (Typical)	30ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power	DC12V	DC 12V	
Power consumption	14W	17.5W	
Dimensions (mm)	491.5x109.4x12.8	491.5x109.4x12.8	496.6x114.6x45
Bezel size (U/B/L/R)	11/6/6/6	11/6/6/6	14.3/9.3/9.3/9.3
Weight (Net)	0.8kg	1kg	2.3kg
Mounting			VESA 75x75, 250x75
OSD key	4 keys (Power switch, menu, +, -)		
OSD control	Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF1905-YNN-A01	19", 1000nits, 1920*360, LID19A, 5in1, V1
SSH1905-YNN-G01	19", 1000nits, 1920x360, LID19A, AD2662GDH, DC12V, 5in1, V1
SSD1905-YNB-G01	19", 1000nits, 1920*360, LID19A, AD2662GDHM, O/B, DC12V, 3in1, V1