
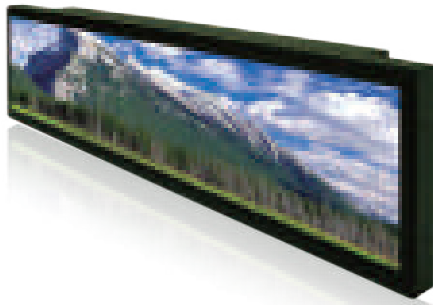


# 1916-A

19.1" Resizing LCD, 1200 nits LED backlight, 1920x388

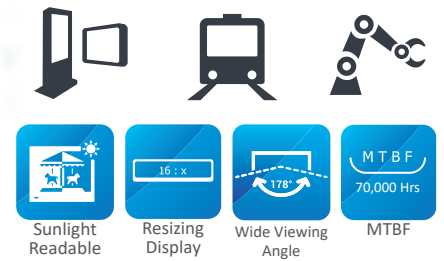

## Key Features

- 19.1" resizing LCD
- Resizing display (aspect ratio of 16:3.2)
- Sunlight readable, high brightness (1,200 nits)
- Resolutions: 1920 x 388
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	SSF1916-A	SSH1916-A	SSD1916-A
Description	19.1" Resizing LCD, 1200 nits LED backlight, 1920x388		
Screen size	19.1"		
Display area (mm)	476.6(H) x 96.3(V)		
Brightness	1200 cd/m <sup>2</sup>		
Resolution	1920x388		
Aspect ratio	16:3.2		
Contrast ratio	3000:1		
Pixel pitch (mm)	0.248 (H) x 0.248 (V)		
Pixel per inch (PPI)	102		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	84%		
Display colors	16.7M		
Response time (Typical)	25ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	18W	23W	
Dimensions (mm)	497.6x121.3x16.55	497.6x121.3x16.55	508x132x47
Bezel size (U/B/L/R)	10.35/10.35/8.9/8.9	10.35/10.35/8.9/8.9	17/17/15/15
Weight (Net)	0.8kg	1kg	2.4kg
Mounting			VESA 100x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF1916-ANN-A01	19.1", 1200nits, 1920*388, LID19A, V01 (5 in 1)
SSH1916-ANN-G02	19.1", 1200nits, 1920*388, LID19A, AD2662GDM, DC12V, V01 (5 in 1)
SSD1916-ANB-G01	19.1", 1200nits, 1920*388, LID19A, AD2662GDHMA, HDMI+USB board, Spesker*2, DC 12V, V01