


# 2106-Y

21" TFT LCD, 1200 nits LED backlight, 1920x132 smart shelf display

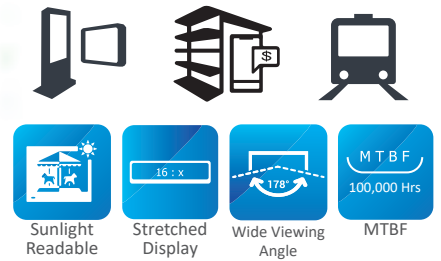

## Key Features

- 21" stretched LCD
- Stretched display (aspect ratio of 16:1)
- Brightness of 1200 nits
- Resolutions: 1920 x 132
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours



## Specifications

	SSF2106-Y	SSH2106-Y	SSD2106-Y
Description	21" Ultra-Wide LCD, 1200 nits LED backlight, 1920x132		
Screen size	21"		
Display area (mm)	529.4(H) x 36.4(V)		
Brightness	1200 cd/m <sup>2</sup>		
Resolution	1920 x 132		
Aspect ratio	16:1		
Contrast ratio	1200:1		
Pixel pitch (mm)	0.2757 (H) x 0.2757 (V)		
Pixel per inch (PPI)	92		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	77%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	DVI-D	
Input power		DC 12V	
Power consumption	11.5W	14.5W	
Dimensions (mm)	542.4 x 54.7 x 13.4	542.4 x 54.7 x 13.4	552.6 x 59.9 x 36.5
Bezel size (U/B/L/R)	11.3/6/6/6	11.3/6/6/6	14.1/8.8/11.3/11.3
Weight (Net)	0.5kg	0.7kg	1.5kg
Mounting		VESA 75X40, 240x40	
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval		CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF2106-YNN-A01	21", 1200nits, 1920*132, LID21A, 5in1, V1
SSH2106-YNN-I01	21", 1200nits, 1920*132, LID21A, AD6038DM, DC12V, 5in1, V1
SSD2106-YNB-I01	21", 1200nits, 1920*132, LID21A, AD6038DM, O/B, DC12V, 3in1, V1