
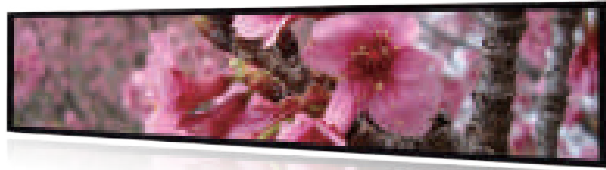


# 2125-A

21.2" Resizing LCD, 1000 nits LED backlight, 1920x316

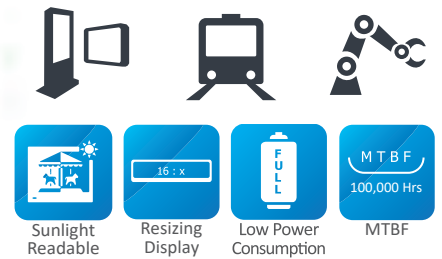

## Key Features

- 21.2" resizing LCD
- Resizing display (aspect ratio of 16:2.6)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 316
- Low power consumption
- BL MTBF: 100,000 hours

## Specifications

	SSF2125-A	SSH2125-A	SSD2125-A
Description	21.2" Resizing LCD, 1000 nits LED backlight, 1920x316		
Screen size	21.2"		
Display area (mm)	531.36(H) x 87.4(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	1920x316		
Aspect ratio	16:2.6		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.276 (H) x 0.276 (V)		
Pixel per inch (PPI)	91		
Viewing angle	170° (H), 160° (V)		
Color saturation (NTSC)	77%		
Display colors	16.7M		
Response time (Typical)	5ms		
Video interface	LVDS	VGA, DVI-D, DP	
Input power		DC 12V	
Power consumption	17W	20W	
Dimensions (mm)	555.9x116.91x17.1	555.9x116.91x17.1	558.5x119.5x46.1
Bezel size (U/B/L/R)	10.1/15.2/10.3/10.3	10.1/15.2/10.3/10.3	11.4/16.5/11.6/11.6
Weight (Net)	1kg	1.3kg	2.1kg
Mounting			VESA 150x30
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF2125-ANN-A01	21.28", 1000nits, 1920*316, LID21A, 5 in 1, V1
SSH2125-ANN-I01	21.28", 1000nits, 1920*316, AD6038GDP+LID, DC 12V, 5 in 1, V1
SSD2125-ANB-I01	21.28", 1000nits, 1920*316, AD6038GDP+LID, O/B, DC 12V.3 in 1, V1