


# 2405-Y

24" TFT LCD, 1000nits LED backlight , 1920x360

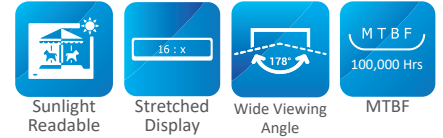

## Key Features

- 24" stretched LCD
- Stretched display (aspect ratio of 16 : 3)
- Sunlight Readable, high brightness (1,000nits)
- Resolution: 1920 x 360
- Wide view angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours

## Specifications

	SSF2405-Y	SSH2405-Y	SSD2405-Y
Description	24" LCD, 1000nits LED backlight , 1920x360		
Screen size	24"		
Display area (mm)	597.8(H) x 112.1(V)		
Brightness	1000 cd/m2		
Resolution	1920x360		
Aspect ratio	16 : 3		
Contrast ratio	850 : 1		
Pixel pitch (mm)	0.3114(H) x 0.3114(V)		
Pixel per inch (PPI)	81		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	30ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	21W	27.5W	
Dimensions (mm)	612.7x132.1x12.8	612.7x132.1x12.8	617.8x137.2x45
Bezel size (U/B/L/R)	11/6/6/6	11/6/6/6	18.2/9.3/9.2/9.2
Weight (Net)	1.23kg	1.7kg	4.6kg
Mounting			VESA 75X75, 250x75
OSD key			
OSD control			
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF2405-YNN-A01	24", 1000nits, 1920*360, LID24C, 5in1, V1
SSH2405-YNN-G01	24", 1000nits, 1920*360, LID24C, AD2662GDH, DC12V, 5in1, V1
SSD2405-YNB-G01	24", 1000nits, 1920*360, LID24C, AD2662GDH, O/B, DC12V, 3in1, V1