


# 2735-A

27.3" Resizing LCD, 1000 nits LED backlight, 945x1080

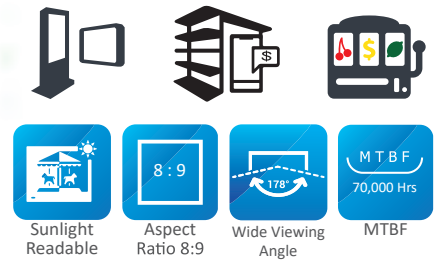

## Key Features

- 27.3" resizing LCD
- Square display (aspect ratio of 8 : 9)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 945 x 1080
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	SSF2735-A	SSH2735-A	SSD2735-A
Description	27.3" Resizing LCD, 1000 nits LED backlight, 945x1080		
Screen size	27.3"		
Display area (mm)	457.8(H) x 523.2(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	945x1080		
Aspect ratio	8:9		
Contrast ratio	3000:1		
Pixel pitch (mm)	0.4845 (H) x 0.4845 (V)		
Pixel per inch (PPI)	51		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	77%		
Display colors	16.7M		
Response time (Typical)	6.5ms		
Video interface	LVDS	VGA, DVI	
Input power		DC 12V	
Power consumption	50W	50W	
Dimensions (mm)	502.7x557.1x18.7	502.7x557.1x18.7	505.2x559.6x49
Bezel size (U/B/L/R)	12.5/12.5/18/18	12.5/12.5/18/18	13.7/13.7/19.2/19.2
Weight (Net)	4.1kg	4.3kg	10.5kg
Mounting			VESA 200x200
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF2735-ANN-A01	27.3", 1000nits, 945*1080, LID27A, V01 (5 in 1)
SSH2735-ANN-G01	27.3", 1000nits, 945*1080, LID27A, AD2662GM, DC 12V, V01 (5 in 1)
SSD2735-ANB-I01	27.3", 1000nits, 945*1080, LID27A, AD6038GD, O/B, DC12V, V01 (2 in 1)