


2805-Y

28" TFT LCD, 1000 nits LED backlight, 1920x360

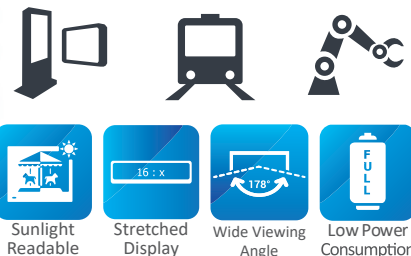

Key Features

- 28" stretched LCD
- Stretched display (aspect ratio of 16:3)
- Brightness of 1000 nits
- Resolutions: 1920 x 360
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 50,000 hours

Specifications

	SSF2805-Y	SSH2805-Y	SSD2805-Y
Description	28" TFT LCD, 1000 nits LED backlight, 1920x360		
Screen size	28"		
Display area (mm)	699.84(H) x 131.22(V)		
Brightness	1000 cd/m ²		
Resolution	1920x360		
Aspect ratio	16:3		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.3645(H) x 0.3645(V)		
Pixel per inch (PPI)	70		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	88%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	22W	25W	
Dimensions (mm)	732 x 165 x 16.8	732 x 165 x 16.8	737x 170 x 57.9
Bezel size (U/B/L/R)	14.5/14.5/14/14	14.5/14.5/14/14	18.2/18.2/17.5/17.5
Weight (Net)	2.4kg	2.6kg	5.4g
Mounting			VESA 75X75, 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF2805-YNN-A01	28", 1000nits, 1920*360, LID28C, 4in1, V1
SSH2805-YNN-G01	28", 1000nits, 1920*360, LID28C, AD2662GDH, DC12V, 4in1, V1
SSD2805-YNB-G01	28", 1000nits, 1920*360, LID28C, AD2662GDH, O/B, DC12V, 3in1, V1