


# 2845-E

28" Resizing LCD, 1000 nits LED backlight, 1920x357

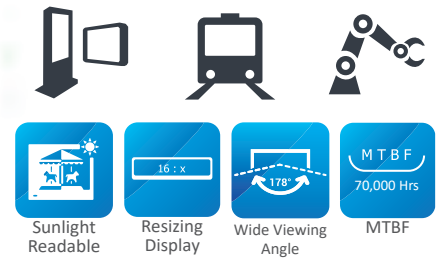

## Key Features

- 28" resizing LCD
- Resizing display (aspect ratio of 16:3)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 357
- Wide viewing angle of 178° (H), 178° (V)
- EN50155 certified
- BL MTBF: 70,000 hours

## Specifications

	SSF2845-E	SSH2845-E	SSD2845-E
Description	28" Resizing LCD, 1000 nits LED backlight, 1920x357		
Screen size	28"		
Display area (mm)	698.4(H) x 129.8(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	1920x357		
Aspect ratio	16:3		
Contrast ratio	6500:1		
Pixel pitch (mm)	0.3637 (H) x 0.3637 (V)		
Pixel per inch (PPI)	70		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	80%		
Display colors	16.7M		
Response time (Typical)	6.5ms		
Video interface	LVDS	VGA, DVI-D, DP	
Input power		DC 12V	
Power consumption	30W	35W	
Dimensions (mm)	735.4x170.5x18	735.4x170.5x18	745.6x183.3x57.5
Bezel size (U/B/L/R)	15/18/15/15	15/18/15/15	24.9/24.9/22.1/22.1
Weight (Net)	2.1kg	2.3kg	5.6kg
Mounting			VESA 75x75, 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF2845-ENN-A21	28", 1000nits, 1920*357, LID28A,V03 (4 in 1)
SSH2845-ENN-G21	28", 1000nits, 1920*357, LID38A,AD2662GD, DC 12V, V03 (4 in 1)
SSD2845-ENB-G21	28", 1000nits, 1920*357, LID28A, AD2662GD, O/B, DC 12V input, V03 (2 in 1)
SSD2845-ENB-G22	28", 1000nits, 1920*357, LID28A, O/B, AD2662GDH, DC 12V, V03 (2 in 1)
SSD2845-ENB-G23	28", 1000nits, 1920*357, LID28A, AD2662GDH+USB (DC5V), O/B, DC70~110V, V03 (2 in 1)