


# 2945-E

29.3" Resizing LCD, 1000 nits LED backlight, 1920x710

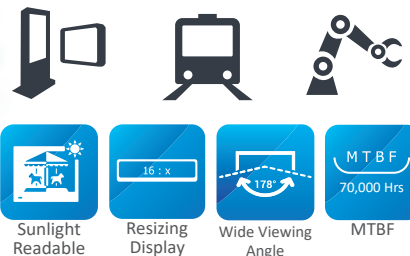

## Key Features

- 29.3" resizing LCD
- Resizing display (aspect ratio of 16:6)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 710
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 70,000 hours

## Specifications

	SSF2945-E	SSH2945-E	SSD2945-E
Description	29.3" Resizing LCD, 1000 nits LED backlight, 1920x710		
Screen size	29.3"		
Display area (mm)	698.4(H) x 258.2(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	1920x710		
Aspect ratio	16:6		
Contrast ratio	3000:1		
Pixel pitch (mm)	0.3637 (H) x 0.3637 (V)		
Pixel per inch (PPI)	70		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	80%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	48W	53W	
Dimensions (mm)	735x298.9x18	735x298.9x18	740.6x306.7x63.7
Bezel size (U/B/L/R)	15/18/15/15	15/18/15/15	22.3/22.3/19.3/19.3
Weight (Net)	3.2kg	3.3kg	8.6kg
Mounting			VESA 500x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF2945-ENN-A11	29.3", 1000nits, 1920*710, LID29A, V02 (2 in 1)
SSH2945-ENN-G12	29.3", 1000nits, 1920*710, LID29A, AD2662GDHM, DC 12V, V02 (2 in 1)
SSD2945-ENB-G12	29.3", 1000nits, 1920*710, LID29A, AD2662GDHM, USB+HDMI board, O/B, DC9~36V (Isolated), V02