
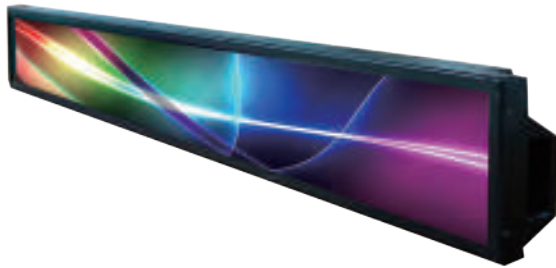


3480-I

34.8" Resizing LCD, 2000 nits LED backlight, 1920x264

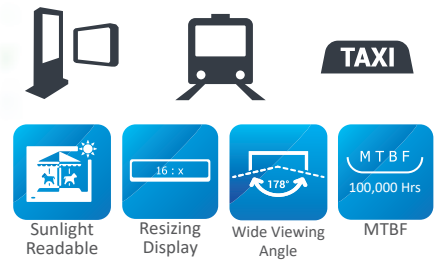

Key Features

- 34.8" resizing LCD
- Resizing display (aspect ratio of 16:2.2)
- Sunlight readable, high brightness (2,000 nits)
- Resolutions: 1920 x 264
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours

Specifications

	SSF3480-I	SSH3480-I	SSD3480-I
Description	34.8" Resizing LCD, 2000 nits LED backlight, 1920x264		
Screen size	34.8"		
Display area (mm)	878.112(H) x 118.6(V)		
Brightness	2000 cd/m ²		
Resolution	1920x264		
Aspect ratio	16:2.2		
Contrast ratio	9940:1		
Pixel pitch (mm)	0.4494 (H) x 0.4494 (V)		
Pixel per inch (PPI)	55		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	80%		
Display colors	1.67M		
Response time (Typical)	8.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI, DP	
Input power		DC 12V	
Power consumption	37W	42W	
Dimensions (mm)	899.4x149.3x18.85	899.4x149.3x18.85	902x152x62.2
Bezel size (U/B/L/R)	12/12/8.6/8.6	12/12/8.6/8.6	13.3/13.3/9.9/9.9
Weight (Net)	2.8kg	3kg	5.8kg
Mounting			VESA 300x75
OSD key		5 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3480-INN-A01	34.8", 2000nits, 1920*264, LID34A, 3in1, V1
SSH3480-INN-J01	34.8", 2000nits, 1920*264, LID34A, AD5827GDHP, DC12V, 3in1, V1
SSD3480-INB-J01	34.8", 2000nits, 1920*264, LID34A, AD5827GDHP, O/B, speaker*2, DC12V, 2in1, V1