


3588-I

35.8" Resizing LCD, 1600 nits LED backlight, MaxRGB, 1920x534

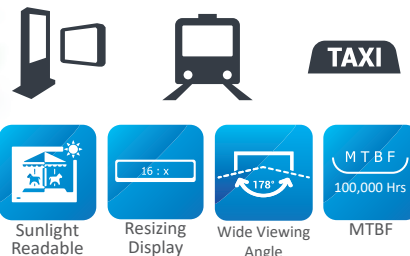

Key Features

- 35.8" resizing LCD
- Resizing display (aspect ratio of 16:4.4)
- Sunlight readable, high brightness (1,600 nits)
- Resolutions: 1920 x 534
- Wide viewing angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours

Specifications

	SSF3588-I	SSH3588-I	SSD3588-I
Description	35.8" Resizing LCD, 1600 nits LED backlight, 1920x534		
Screen size	35.8"		
Display area (mm)	878.1(H) x 240(V)		
Brightness	1600 cd/m ²		
Resolution	1920x534		
Aspect ratio	16:4.4		
Contrast ratio	10000:1		
Pixel pitch (mm)	0.4494 (H) x 0.4494 (V)		
Pixel per inch (PPI)	55		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	80%		
Display colors	16.7M		
Response time (Typical)	8.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI, DP	
Input power		DC 12V	
Power consumption	59W	64W	
Dimensions (mm)	899.4x270.7x18.8	899.4x270.7x18.8	902x273.3x62.2
Bezel size (U/B/L/R)	12/12/8.6/8.6	12/12/8.6/8.6	13.3/13.3/9.9/9.9
Weight (Net)	4.5kg	4.8kg	9.2kg
Mounting			VESA 300x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3588-INN-A01	35.8", 1600nits, 1920*534, LID35A, 3in1, V1
SSH3588-INN-J01	35.8", 1600nits, 1920*534, LID35A, AD5827GDHP, AC100~240V, 3in1, V1
SSD3588-INB-J01	35.8", 1600nits, 1920*534, LID35A, AD5827GDHP, O/B, speaker*2, AC100~240V, 2in1, V1