
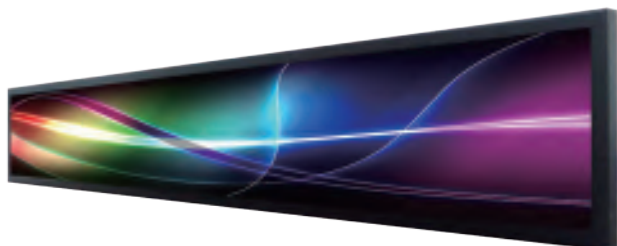


3665-I

36.6" Resizing LCD, 1000 nits LED backlight, 1920x290

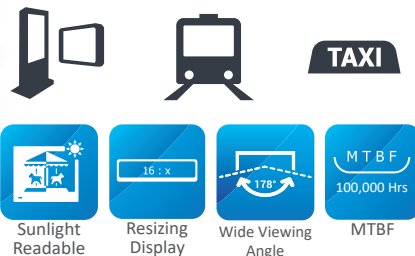

Key Features

- 36.6" resizing LCD
- Resizing display (aspect ratio of 16 : 2.4)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 290
- Wide view angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours

Specifications

	SSF3665-I	SSH3665-I	SSD3665-I
Description	36.6" Resizing LCD, 1000 nits LED backlight, 1920x290		
Screen size	36.6"		
Display area (mm)	919.3(H) x 138.8(V)		
Brightness	1000 cd/m ²		
Resolution	1920x290		
Aspect ratio	16:2.4		
Contrast ratio	7500:1		
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)		
Pixel per inch (PPI)	52		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	82%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	19W	24W	
Dimensions (mm)	960x174.2x15.8	960x174.2x15.8	962.8x177x56.2
Bezel size (U/B/L/R)	15.2/15.2/17.9/17.9	15.2/15.2/17.9/17.9	16.6/16.6/19.2/19.2
Weight (Net)	3.2kg	3.3kg	6.3kg
Mounting			VESA 75x75, 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3665-INN-A01	36.6", 1000nits, 1920*290, LID36A, 2in1, V1
SSH3665-INN-G01	36.6", 1000nits, 1920*290, LID36A, AD2662GDHM, DC12V, 2in1, V1
SSD3665-INB-G01	36.6", 1000nits, 1920*290, LID36A, AD2662GDHM, O/B, DC12V, 2in1, V1