


3705-Y

37" TFT LCD, 1000 nits LED backlight, 1920x540

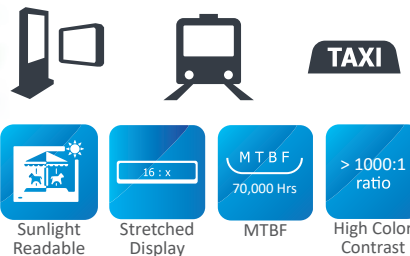

Key Features

- 37" stretched LCD
- Stretched display (aspect ratio of 16 : 4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 540
- High contrast ratio (4000:1)
- BL MTBF: 70,000 hours

Specifications

	SSF3705-Y	SSH3705-Y	SSD3705-Y
Description	37" LCD, 1000 nits LED backlight, 1920x540		
Screen size	37"		
Display area (mm)	904.32(H) x 254.34(V)		
Brightness	1000 cd/m ²		
Resolution	1920x540		
Aspect ratio	16:4.5		
Contrast ratio	4000:1		
Pixel pitch (mm)	0.47(H) x 0.47(V)		
Pixel per inch (PPI)	54		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	72%		
Display colors	16.7M		
Response time (Typical)	6.5ms		
Video interface	LVDS	DVI-I , HDMI, DP	
Input power	AC 100~240V		
Power consumption	59W	63W	
Dimensions (mm)	923.3x 277.1 x 30.5	923.3x 277.1 x 30.5	926.8x 280.1 x 73
Bezel size (U/B/L/R)	9.8/9.8/7.9/7.9	9.8/9.8/7.9/7.9	13.3/13.3/9.7/9.7
Weight (Net)	4.7kg	5kg	9.3kg
Mounting	VESA 300x75		
OSD key	4 keys (Power switch, menu, +, -)		
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval	CE, FCC		

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF3705-YNN-A11	37", 1000nits, 1920*540, LID on Board, 5in1, V2
SSH3705-YNN-Q11	37", 1000nits, 1920*540, LID on Board, AD8891GDHP, AC100~240V, 5in1, V2
SSD3705-YNB-Q11	37", 1000nits, 1920*540, LID on Board, AD8891GDHP, O/B, AC100~240V, 3in1, V2