


# 3805-I

37.6" Resizing LCD, 1000 nits LED backlight, 1920x540

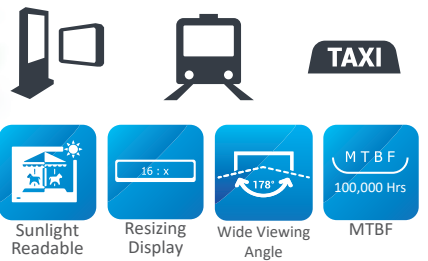

## Key Features

- 37.6" resizing LCD
- Resizing display (aspect ratio of 16 : 4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 1920 x 540
- Wide view angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours

## Specifications

	SSF3805-I	SSH3805-I	SSD3805-I
Description	37.6" Resizing LCD, 1000 nits LED backlight, 1920x540		
Screen size	37.6"		
Display area (mm)	919.30(H) x 258.5(V)		
Brightness	1000 cd/m <sup>2</sup>		
Resolution	1920x540		
Aspect ratio	16:4.5		
Contrast ratio	8000:1		
Pixel pitch (mm)	0.4788 (H) x 0.4788 (V)		
Pixel per inch (PPI)	52		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	82%		
Display colors	16.7M		
Response time (Typical)	9.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI	
Input power		DC 12V	
Power consumption	31.4W	36.4W	
Dimensions (mm)	960x302.4x15.8	960x302.4x15.8	962.6x304.9x54.2
Bezel size (U/B/L/R)	15.2/23.8/17.9/17.9	15.2/23.8/17.9/17.9	16.4/25/19.1/19.1
Weight (Net)	4.8kg	5kg	8.8kg
Mounting			VESA 400x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF3805-INN-A21	37.6", 1000nits, 1920*540, LID38A, 2in1, V3
SSH3805-INN-G21	37.6", 1000nits, 1920*540, LID38A, AD2662GD, DC12V, 2in1, V3
SSD3805-INB-G21	37.6", 1000nits, 1920*540, LID38A, AD2662GDHM, O/B, DC12V, 2in1, V3