


# 4215-I

42.1" Resizing LCD, 800 nits LED backlight, MaxRGB, 1900x2160

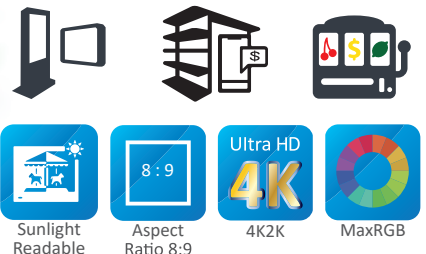

## Key Features

- 42.1" resizing LCD
- Resizing display (aspect ratio of 8 : 9)
- Sunlight readable, high brightness (800 nits)
- Resolutions: 1900 x 2160
- MaxRGB (NTSC 91%)
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

## Specifications

	SSF4215-I	SSH4215-I	SSD4215-I
Description	42.1" Resizing LCD, 800 nits LED backlight, MaxRGB, 1900x2160		
Screen size	42.1"		
Display area (mm)	706.8(H) x 803.52 (V)		
Brightness	800 cd/m <sup>2</sup>		
Resolution	1900x2160		
Aspect ratio	8:9		
Contrast ratio	6000:1		
Pixel pitch (mm)	0.372 (H) x 0.372 (V)		
Pixel per inch (PPI)	68		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	91%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	DVI, HDMI, DP	
Input power	AC 100~240V		
Power consumption	131W	136W	
Dimensions (mm)	741.3x838x22.4	741.3x838x22.4	743.9x840.6x70.8
Bezel size (U/B/L/R)	15/15/15/15	15/15/15/15	16.3/16.3/16.3/16.3
Weight (Net)	12.4kg	13kg	22kg
Mounting			VESA 400x200, 400x300
OSD key	5 keys (Power switch, menu, +, Exit, -)		
OSD control	Brightness, color, contrast, H/V position... etc		
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF4215-INK-A12	42.1"(right), 800nits, MaxRGB, T1, 1900*2160, LID42A, 2in1, V2
SSH4215-INK-M12	42.1"(right), 800nits, MaxRGB, 1900*2160, T1, LID42A, AD9131DHP, AC100~240V, 2in1, V2
SSD4215-INK-M12	42.1"(right), 800nits, MaxRGB, 1900*2160, T1, LID42A, AD9131DHP, O/B, speaker*2, AC100~240V, V2