


4485-INK

44.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x1076

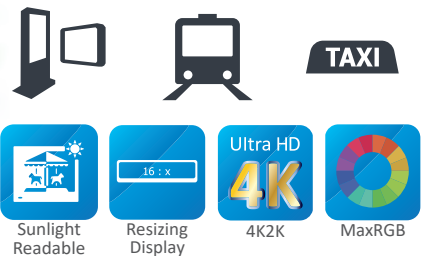

Key Features

- 44.8" resizing LCD
- Resizing display (aspect ratio of 16 : 4.5)
- Sunlight readable, high brightness (1,000 nits)
- Resolutions: 3840 x 1076
- MaxRGB (NTSC 94%)
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

| | SSF4485-I | SSH4485-I | SSD4485-I |
|-------------------------|--|--|---------------------|
| Description | 44.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x1076 | | |
| Screen size | 44.8" | | |
| Display area (mm) | 1095.84(H) x 307.1 (V) | | |
| Brightness | 1000 cd/m ² | | |
| Resolution | 3840x1076 | | |
| Aspect ratio | 16:4.5 | | |
| Contrast ratio | 6300:1 | | |
| Pixel pitch (mm) | 0.2854 (H) x 0.2854 (V) | | |
| Pixel per inch (PPI) | 89 | | |
| Viewing angle | 178° (H), 178° (V) | | |
| Color saturation (NTSC) | 94% | | |
| Display colors | 1.07G | | |
| Response time (Typical) | 9.5ms | | |
| Video interface | V-by-One | VGA, DVI-D, HDMI, DP | |
| Input power | | AC 100~240V | |
| Power consumption | 113W | 118W | |
| Dimensions (mm) | 1121.7x338.9x21.6 | 1121.7x338.9x21.6 | 1124.3x341.5x64.6 |
| Bezel size (U/B/L/R) | 13.3/13.3/10.9/10.9 | 13.3/13.3/10.9/10.9 | 14.6/14.6/12.2/12.2 |
| Weight (Net) | 6.8kg | 7kg | 16.2kg |
| Mounting | | | VESA 300x75 |
| OSD key | | 5 keys (Power switch, menu, +, Exit, -) | |
| OSD control | | Brightness, color, contrast, H/V position... etc | |
| Operating temperature | 0°C ~ +50°C | | |
| Storage temperature | -20°C ~ +60°C | | |
| Product approval | | | CE, FCC |

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

| | |
|-----------------|---|
| SSF4485-INK-A01 | 44.8", 1000nits, 3840*1076, MaxRGB, LID44A, 3in1, V1 |
| SSH4485-INK-N11 | 44.8", 1000nits, 3840*1076, MaxRGB, LID44A, AD2796DHP, AC100~240V, 3in1, V2 |
| SSD4485-INK-N11 | 44.8", 1000nits, 3840*1076, MaxRGB, LID44A, AD2796DHP, O/B, speaker*2, AC100~240V, 2in1, V2 |
| | |
| | |