


# 4788-B

47.8" Resizing LCD, 1600 nits LED backlight, 1920x178

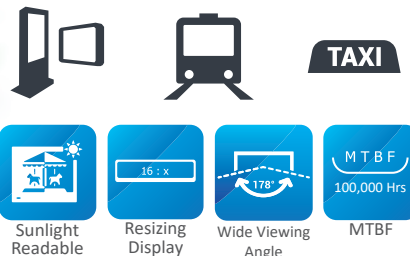

## Key Features

- 47.8" resizing LCD
- Resizing display (aspect ratio of 16 : 1.5)
- Sunlight readable, high brightness (1,600 nits)
- Resolutions: 1920 x 178
- Wide view angle of 178° (H), 178° (V)
- Low power consumption
- BL MTBF: 100,000 hours

## Specifications

	SSF4788-B	SSH4788-B	SSD4788-B
Description	47.8" Resizing LCD, 1600 nits LED backlight, 1920x178		
Screen size	47.8"		
Display area (mm)	1209.6(H) x 112.1(V)		
Brightness	1600 cd/m <sup>2</sup>		
Resolution	1920x178		
Aspect ratio	16:1.5		
Contrast ratio	1700:1		
Pixel pitch (mm)	0.63 (H) x 0.63 (V)		
Pixel per inch (PPI)	40		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	VGA,DVI-D,HDMI	
Input power		DC 12V	
Power consumption	37W	42W	
Dimensions (mm)	1244.6x151.5x23.9	1244.6x151.5x23.9	1247.2x154.1x62.9
Bezel size (U/B/L/R)	17.7/17.7/15.5/15.5	17.7/17.7/15.5/15.5	19/19/16.8/16.8
Weight (Net)	4kg	4.2kg	6.6kg
Mounting			VESA 400x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

## Ordering Information

SSF4788-BNN-A01	47.8", 1600nits, 1920*178, LID47A, 4in1, V1
SSH4788-BNN-G01	47.8", 1600nits, 1920*178, LID47A, AD2662GDHM, DC12V, 4in1, V1
SSD4788-BNB-G01	47.8", 1600nits, 1920*178, LID47A, AD2662GDHM, O/B, DC12V, 2in1, V1