


4848-U

48.4" Resizing LCD, 1600nits LED backlight, 1920x358

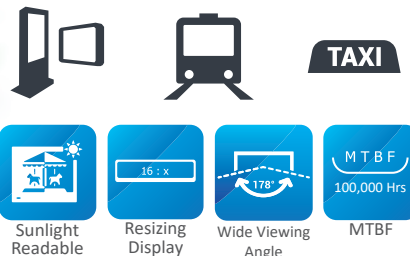

Key Features

- 48.8" resizing LCD
- Ultra-wide Screen (16 : 3)
- Sunlight Readable, high brightness (1,600 nits)
- Resolution: 1920 x 358
- Slim bezel
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4848-U	SSH4848-U	SSD4848-U
Description	48.4" Resizing LCD, 1600nits LED backlight, 1920x358		
Screen size	48.4"		
Display area (mm)	1209.6(H) x 225.5(V)		
Brightness	1600 cd/m ²		
Resolution	1920x358		
Aspect ratio	16:3		
Contrast ratio	1000:1		
Pixel pitch (mm)	0.63 (H) x 0.63 (V)		
Pixel per inch (PPI)	40		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	76%		
Display colors	16.7M		
Response time (Typical)	6.5ms		
Video interface	LVDS	VGA, DVI-D, HDMI, VIDEO, RS232, AUDIO	
Input power		AC 100~240V	
Power consumption	69W	80.5W	
Dimensions (mm)	1244.6x264.9x27.1	1244.6x264.9x27.1	1247.4x267.7x70.3
Bezel size (U/B/L/R)	17.7/17.7/15.5/15.5	17.7/17.7/15.5/15.5	19.1/19.1/16.9/16.9
Weight (Net)	9.3kg	9.7kg	12kg
Mounting			VESA 300x75
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4848-UNN-A01	48.4", 1600nits, 1920*358, LID48A, 2in1, V1
SSH4848-UNN-G01	48.4", 1600nits, 1920*358, LID48A, AD2662GDHMVAR, speaker*2, AC100~240V, 2in1, V1
SSD4848-UNB-G01	48.4", 1600nits, 1920*358, LID48A, AD2662GDHMVAR, speaker*2, O/B, AC100~240V, V1