


4956-B

49.5" Resizing LCD, 1200 nits LED backlight, 1920x538

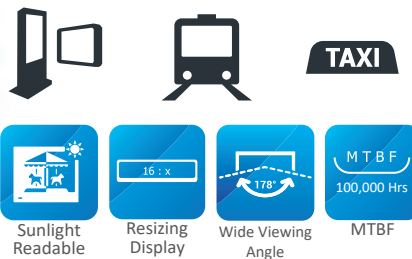

Key Features

- 49.5" resizing LCD
- Resizing display (aspect ratio of 16:4.5)
- Sunlight readable, high brightness (1,200 nits)
- Resolutions: 1920 x 538
- Wide view angle of 178° (H), 178° (V)
- BL MTBF: 100,000 hours

Specifications

	SSF4956-B	SSH4956-B	SSD4956-B
Description	49.5" Resizing LCD, 1200 nits LED backlight, 1920x538		
Screen size	49.5"		
Display area (mm)	1209.6(H) x 338.9(V)		
Brightness	1200 cd/m ²		
Resolution	1920x538		
Aspect ratio	16:4.5		
Contrast ratio	1500:1		
Pixel pitch (mm)	0.63 (H) x 0.63 (V)		
Pixel per inch (PPI)	40		
Viewing angle	178° (H), 178° (V)		
Color saturation (NTSC)	81%		
Display colors	16.7M		
Response time (Typical)	8ms		
Video interface	LVDS	VGA,DVI-D,HDMI	
Input power		AC 100~240V	
Power consumption	94.7W	99.7W	
Dimensions (mm)	1244.6x378.7x27.6	1244.6x378.7x27.6	1247.5x381.5x66.6
Bezel size (U/B/L/R)	17.9/17.9/15.5/15.5	17.9/17.9/15.5/15.5	19.3/19.3/17/17
Weight (Net)	11.4kg	11.5kg	18.4kg
Mounting			VESA 400x100, 800x100
OSD key		4 keys (Power switch, menu, +, -)	
OSD control		Brightness, color, contrast, H/V position... etc	
Operating temperature	0°C ~ +50°C		
Storage temperature	-20°C ~ +60°C		
Product approval			CE, FCC

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF4956-BNN-A01	49.5", 1200nits, 1920*538, LID49A, V01
SSH4956-BNN-G01	49.5", 1200nits, 1920*538, LID49A, AD2662GDHMVAR, speaker*2, AC100~240V, V01
SSD4956-BNB-G01	49.5", 1200nits, 1920*538, LID49A, AD2662GDHMVAR, speaker*2, O/B, AC100~240V, V01