

5197-I

51.9" Resizing LCD, 1400 nits LED backlight, 3840 x 1077



TAXI



Sunlight Readable




Resizing Display



4K2K



MTBF

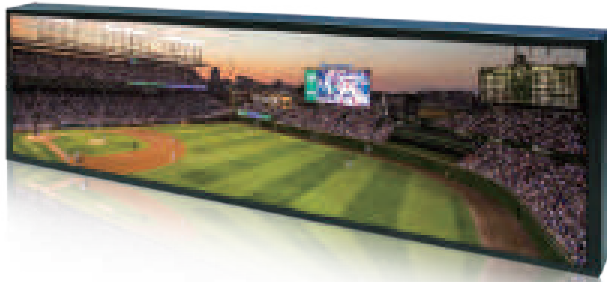

Key Features

- 51.9" resizing LCD
- Resizing display (aspect ratio of 16 : 4.4)
- Sunlight readable, high brightness (1400 nits)
- Resolutions: 3840x1077
- Wide view angle of 178° (H), 178° (V)
- Slim bezel
- BL MTBF: 100,000 hours

Specifications

	SSF5197-INU	SSH5197-INU	SSD5197-INU
Description	51.9" Resizing LCD, 1400 nits LED backlight, 3840x1077		
Screen size	51.9"		
Display area (mm)	1270(H) x 359.7(V)		
Brightness	1400 cd/m2		
Resolution	3840x1077		
Aspect ratio	16 : 4.4		
Contrast ratio	6130 : 1		
Pixel pitch (mm)	0.33(H) x 0.33(V)		
Pixel per inch (PPI)	76		
Viewing angle	178°(H),178°(V)		
Color saturation (NTSC)	83%		
Display colors	1.07G		
Response time (Typical)	9.5ms		
Video interface	V-by-One	VGA, DVI-D, HDMI, DP	
Input power		DC12V	AC100~240V
Power consumption	129W	134W	
Dimensions (mm)	1301.6x 392.2 x 24.2	1301.6x 392.2 x 24.2	
Bezel size (U/B/L/R)	13.2/13.2/13.2/13.2	13.2/13.2/13.2/13.2	
Weight (Net)	9.8 kg	10.6 kg	
Mounting		300x75kg	
OSD key		5 Keys (Power Switch, Menu, +, -, Exit)	
OSD control		Brightness, Color, Contrast, Auto Turing, H/V Position...etc	
Operating temperature	0 °C ~ 50 °C		
Storage temperature	-20 °C ~ 60 °C		
Product approval		CE, FCC	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Ordering Information

SSF5197-INU-A01	51.9", 1400nits, 3840*1077, LID51A, 3in1, V1
SSH5197-INU-M01	51.9", 1400nits, 3840*1077, LID51A, AD9131GDHP, AC100~240V, 3in1, V1
SSD5197-INU-M01	51.9", 1400nits, 3840*1077, LID51A, AD9131GDHP, O/B, speaker*2, AC100~240V, 2in1, V1